

4 CH/ 8 CH HD Analog Digital Video Recorder Specifications




Key Features

- Up to 4 CH (CJ-HDR104) / 8 CH (CJ-HDR108) real-time recording playback and live view
- H.264 video encode
- HDMI/ VGA simultaneous video output
- Support 1 SATA HDDs up to 6TB, 2 USB (4 CH/ 8 CH)
- Digital Zoom in Live & Playback
- iPhone, iPad, & Android

Standard Accessories

- Quick guide.....1 pc
- Important safety instruction.....1 pc
- CD1pc

Appearance

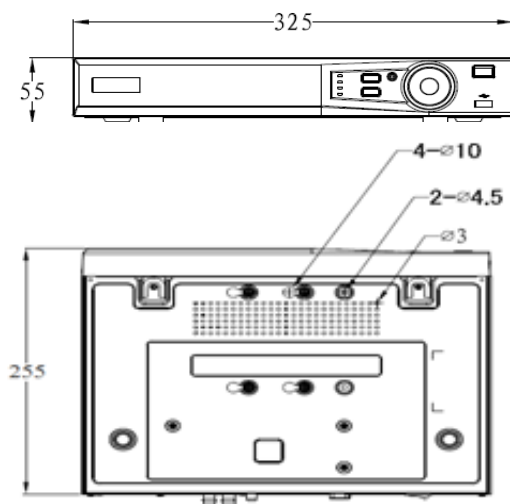

Model	CJ-HDR104	CJ-HDR108
Video/ Audio IF		
Video Input	4 CH, BNC	8 CH, BNC
Type	HDCVI	720p/ 1080p HDCVI
	Analog	NTSC/ PAL
Video Output	1 HDMI, 1 VGA	
Audio Input	1 CH, RCA	
Audio Output	1 CH, RCA	
Two-way Talk	Reuse audio input/ output CH 1	
Display		
Output Resolution	1920x1080, 1280x1024, 1280x720, 1024x768	
Multiscreen Mode	1/4	1/4/8/9
Privacy Masking	4 rectangular zones (each camera)	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Video/ Audio Format		
Video/ Audio Compression	H.264/ G.711	
Record Rate	Main Stream	1080P (1~12/15fps)/ 720P/ 960H/ D1 (1~25/30fps)
	Extra Stream	CIF/ QCIF (1~25/30fps), D1 (1~12/15fps)
Bit Rate	96~4096Kb/s	
Record Mode	Manual, Schedule (Regular (Continuous), MD), Stop	
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Alarm/ Event		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396 (22x18), Video Loss & Camera Blank	
Playback & Backup		
Sync Playback	1/4	1/4/9
Search Mode	Time/ Date, MD & Exact search (accurate to second)	
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/ Network	
Network		
Network Interface	RJ-45 port (10/ 100M)	
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Mobile Device	iPhone, iPad, Android	
HDD		
Type	1 SATA port, up to 6TB	
External Interface		
USB Interface	2 ports (1 Rear), USB2.0	
RS485 Camera Interface	1 port, For PTZ Control	
General Specifications		
Power Supply	DC12V/4A	
Power Consumption	10W (without HDD)	
Working Environment	-10°C~+55°C / 10%~90%RH / 86~106kpa	
Dimension(WxDxH)	Mini 1U, 325mmx255mmx55mm	
Weight	1.5KG (without HDD)	

Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: