

QNV-6010R/6020R/6030R

2Megapixel Vandal-Resistant Full HD
Network IR Dome Camera



QNV-6010R


QNV-6020R/6030R

Key Features

- Max. 2M (1920 x 1080) resolution
- Built-in 2.8mm fixed lens (QNV-6010R)
3.6mm fixed lens (QNV-6020R)
6mm fixed lens (QNV-6030R)
- Max. 30fps@all resolutions (H.265/H.264)
- H.265, H.264, MJPEG codec supported, Multiple streaming
- Motion detection, Tampering, Defocus detection
- micro SD (128GB) memory slot, PoE / 12V DC
- IR viewable length 20m (QNV-6010R), 25m (QNV-6020R)
30m (QNV-6030R)
- Hallway view, WiseStream support, IP66, IK10
- LDC support (Lens Distortion Correction)

Dimensions

Unit : mm (inch)

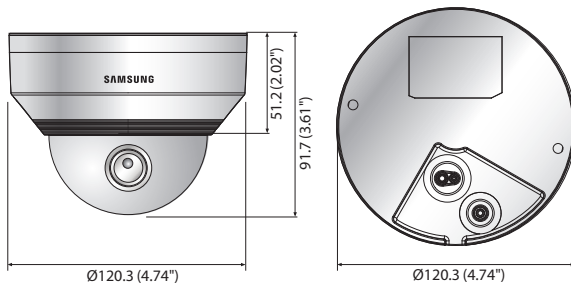

Accessories (Optional)



QNV-6010R/6020R/6030R	
VIDEO	
Imaging Device	1/2.9" 2.19M CMOS
Total Pixels	2,000(H) x 1,121(V)
Effective Pixels	1,984(H) x 1,105(V)
Scanning System	Progressive
Min. Illumination	Color: 0.15Lux, B/W: 0Lux (IR LED on)
LENS	
Focal Length (Zoom Ratio)	2.8mm fixed (QNV-6010R), 3.6mm fixed (QNV-6020R), 6mm fixed (QNV-6030R)
Max. Aperture Ratio	F1.8
Angular Field of View	H : 110.0° / V : 61.0° / D : 125.0° (QNV-6010R) H : 86.48° / V : 46.22° / D : 102.44° (QNV-6020R) H : 52.54° / V : 28.86° / D : 61.14° (QNV-6030R)
Lens Type	Fixed
Mount Type	Board type
PAN / TILT / ROTATE	
Pan / Tilt / Rotate Range	0° ~ 350° / 0° ~ 67° / 0° ~ 355°
OPERATIONAL	
IR Viewable Length	20m (65.62ft) : QNV-6010R, 25m (82.02ft) : QNV-6020R, 30m (98.43ft) : QNV-6030R
Camera Title	Off / On (Displayed up to 20 characters per line) - W/W : English / Numeric / Special characters - China : English / Numeric / Special / Chinese characters - Common : Multi-line (Max. 5), Color (Grey / Green / Red / Blue / Black / White), Transparency, Auto scale by resolution
Day & Night	True Day & Night
Backlight Compensation	Off / BLC / WDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR (Off / On)
Motion Detection	Off / On (4ea polygonal zones)
Privacy Masking	Off / On (6ea rectangular zones)
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC (Lens Distortion Correction)	Off / On (5 levels with min / max)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker
Flip / Mirror	Flip / Mirror / Hallway view
Intelligent Video Analytics	Motion detection with metadata, Tampering, Defocus detection
Alarm I/O	Input 1 / Output 1
Alarm Triggers	Motion detection, Tampering detection, SD card error, NAS error, Alarm input, Defocus detection
Alarm Events	File upload via FTP and E-mail, Local storage recording at event, Notification via E-mail, External output
Pixel Counter	Support (Plug-in viewer only)
NETWORK	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.265, H.264, MJPEG
Resolution	1920 x 1080, 1280 x 1024, 1280 x 960, 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240
Max. Framerate	H.265/H.264 : Max. 30fps at all resolutions, MJPEG : Max. 15fps
Smart Codec	WiseStream
Video Quality Adjustment	H.265/H.264 : Target bitrate level control, MJPEG : Quality level control
Bitrate Control Method	H.265/H.264 : CBR or VBR, MJPEG : VBR
Streaming Capability	Multiple streaming (Up to 3 profiles)
Audio I/O	Line in
Audio Compression Format	G.711 u-law / G.726 selectable
Audio Communication	G.726 (ADPCM) 8KHz, G.711 8KHz, G.726 : 16Kbps, 24Kbps, 32Kbps, 40Kbps
IP	Uni-directional audio
Protocol	IPv4, IPv6
Security	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour
Streaming Method	HTTPS(SSL) login authentication, Digest login authentication
Max. User Access	IP address filtering, User access log, 802.1x authentication
Storage	Unicast / Multicast
Application Programming Interface	6 users at unicast mode
Webpage Language	micro SD/SDHC/SDXC max. 128G, NAS - Motion images recorded in the SD memory card can be downloaded - Manual recording at local PC
Web Viewer	QNVIF Profile S/G, SUNAPI (HTTP API)
Central Management Software	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Portuguese, Turkish, Polish, Czech, Dutch, Hungary, Greek
ENVIRONMENTAL	Supported OS : Windows 7, 8.1, 10, Mac OS X 10.9, 10.10, 10.11
Operating Temperature / Humidity	Plug-in free Webviewer - Supported Browser : Google Chrome 47, MS Edge 20
Storage Temperature / Humidity	Plug-in Webviewer - Supported Browser : MS Explore 11, Mozilla Firefox 43, Apple Safari 9 * Mac OS X only
Ingress Protection / Vandal Resistance	SmartViewer
ELECTRICAL	Operating Temperature / Humidity : -30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH * Start up should be done at above -20°C (-4°F)
Input Voltage / Current	Storage Temperature / Humidity : -30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Power Consumption	Ingress Protection / Vandal Resistance : IP66 / IK10
MECHANICAL	Input Voltage / Current : PoE (IEEE802.3af, Class3) / 12V DC
Color / Material	Power Consumption : Max. 7W (PoE), Max. 5.8W (12V DC) : QNV-6010R Max. 6.8W (PoE), Max. 5.7W (12V DC) : QNV-6020R/6030R
Dimensions (WxH)	Color / Material : Ivory / Metal
Weight	Dimensions (WxH) : Ø120.3 x 91.7mm (Ø4.74" x 3.61")
	Weight : 490g (1.08 lb)

* The latest product information / sepecification can be found at <http://security.hanwhatechwin.com>